




# Go Deep International Inc.

## GDI-0.30M SPAR BUOYS

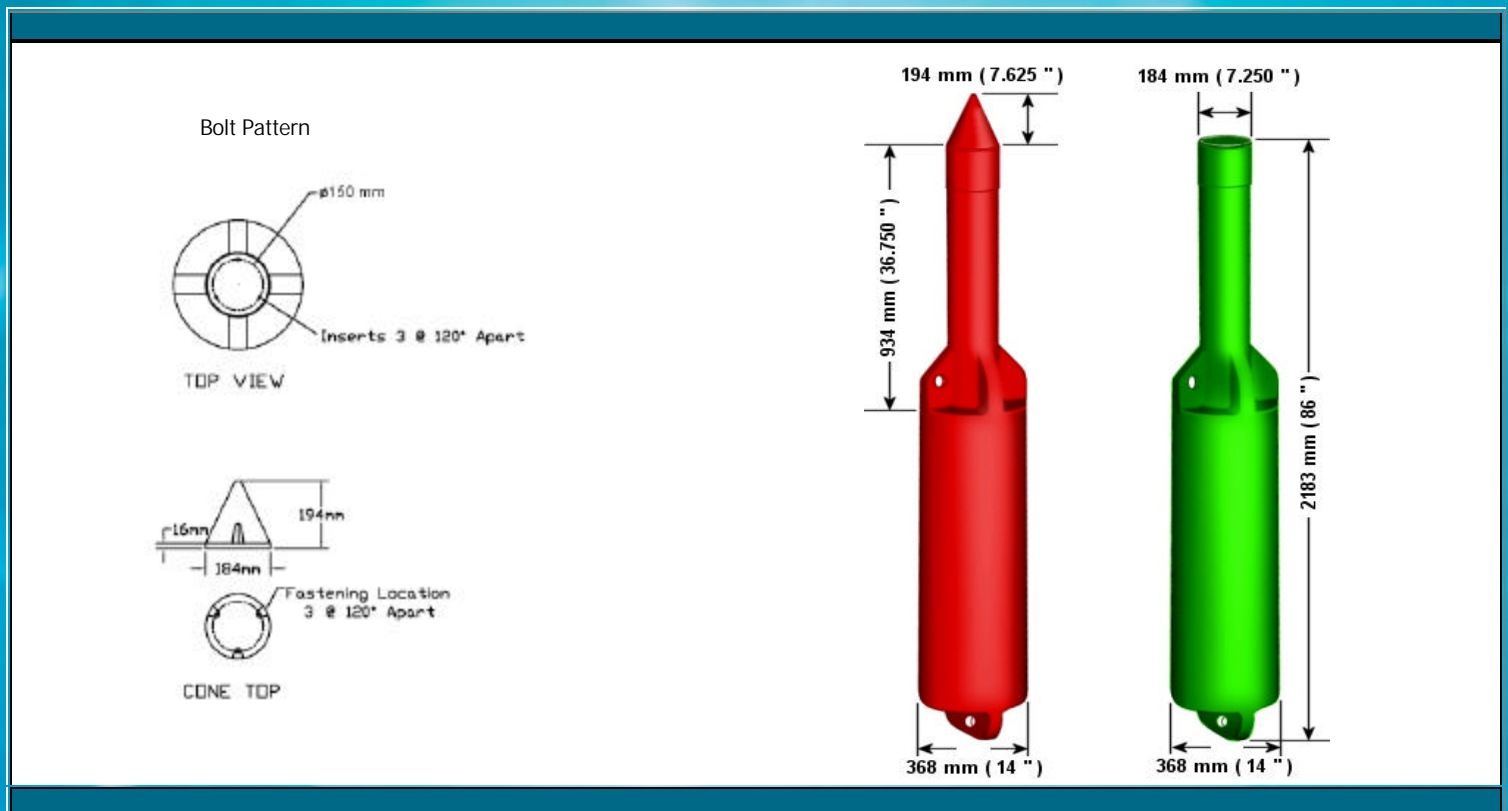

### GDI-0.30M SPAR BUOY SPECIFICATIONS

Construction	Rotationally molded in compounded medium density UV-20 stabilized virgin polyethylene	
Wall Thickness	6 mm	
Foam Filling	Heat bonded expanded polystyrene	
Diameter	368 mm	14 in
Length	2183 mm	86 in
Draft	837 mm	33 in
Freeboard	1346 mm	53 in
Submergence	1.07 kg/cm	6.0 lbs/in
Visual Area	0.36 m <sup>2</sup>	3.9 ft <sup>2</sup>
Radar Reflector	Mobri Tube Type ( 2 m <sup>2</sup> )	
Surface Color	As Specified	
Hardware	All 316 Stainless Steel	

*Buoys and solar powered marine lights can be purchased separately or together as promotional packages*

### CONTACT



10 Watertower Road  
Saint John, NB E2M 7K2  
CANADA

Toll Free (North America Only)  
1-877-446-3337

Phone: (506) 633-7850  
Fax: (506) 633-7859  
Email: info@godeepintl.ca

[www.BuoysandLights.com](http://www.BuoysandLights.com)