




# Go Deep International Inc.

## GDI-1.22M CON-CAN BUOYS

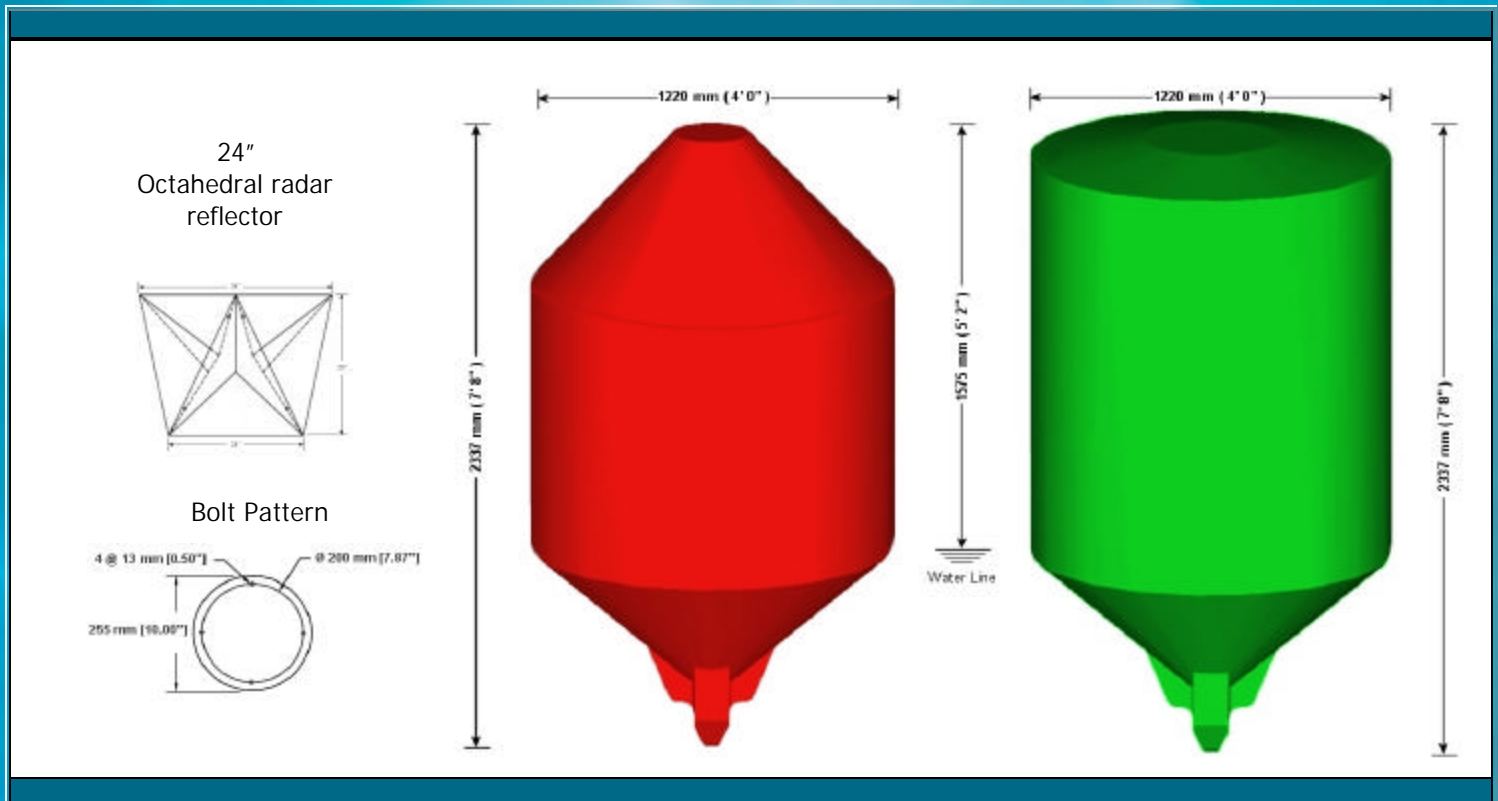

### GDI-1.22M BUOY SPECIFICATIONS

<b>Construction</b>	Rotationally molded in compounded medium density UV-20 stabilized virgin polyethylene	
<b>Wall Thickness</b>	10 mm	
<b>Foam Filling</b>	Heat bonded expanded polystyrene	
<b>Air Weight</b>	130 kg	285 lbs
<b>Diameter</b>	1220 mm	48 in
<b>Length</b>	2337 mm	92 in
<b>Draft</b>	762 mm	30 in
<b>Freeboard</b>	1575 mm	62 in
<b>Submergence</b>	11.8 kg/cm	66 lbs/in
<b>Visual Area – CAN</b>	1.91 m <sup>2</sup>	20.5 ft <sup>2</sup>
<b>Visual Area – CONICAL</b>	1.67 m <sup>2</sup>	18.0 ft <sup>2</sup>
<b>Optional Radar Reflector</b>	30 m <sup>2</sup> ( 15 db) - 24" Octahedral	
<b>Surface Color</b>	As Specified	
<b>Hardware</b>	All 316 Stainless Steel	

*Buoys and solar powered marine lights can be purchased separately or together as promotional packages*

### CONTACT



10 Watertower Road  
Saint John, NB E2M 7K2  
CANADA

Toll Free (North America Only)  
1-877-446-3337

Phone: (506) 633-7850  
Fax: (506) 633-7859  
Email: info@godeepintl.ca

[www.BuoysandLights.com](http://www.BuoysandLights.com)